

PEGA MATERIAL HOIST – TWO MAST TOWER VERSION

PIONEER IN INNOVATION

QUALITY – RELIABILITY – USER FRIENDLY

PEGA "PLC" - Programmable Landing Control for exact stops for 100 floors

PEGA "LDS" - Load Detection System – brings up to 70% lower power consumption and higher speed

PEGA "FIS" - Fault Indication System

HOT DIP GALVANIZED CAGES WITH STEEL FLOOR AND ALL ACCESSORIES FOR UNLIMITED LIFETIME - ALL AS STANDARD

PEGA 60ME/II/VFC

TECHNICAL DATA

Payload capacity	kg	6000
Speed	m/min	0 - 30
Rated lifting height	m	100
Max. tie spacing	m	12

CAGE DIMENSIONS


Internal width	m	6,0
Internal length	m	4,5
Railing height	m	1,1

ELECTRICAL DATA

Power supply range	400V 50Hz 3Ph
Power supply fuse	80A
Motor machinery	PEGA/SEW
Starting current	71A
Power consumption	85kVA
Cable guiding system	Cable trolley

WEIGHTS

Cage	kg	4000
Mast section with one rack	kg	150
Mast section length	m	1,508

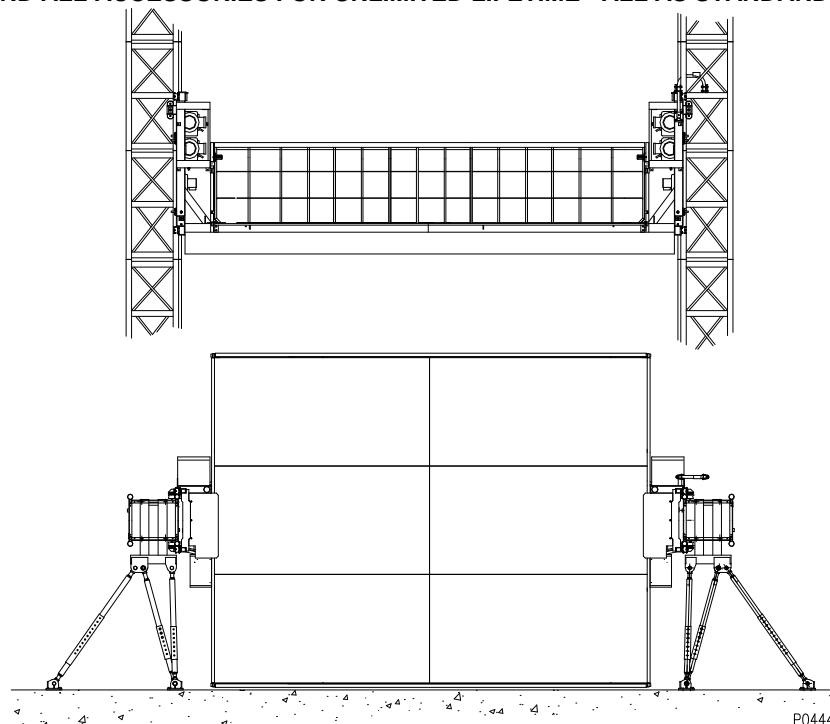

GENERAL

Platforms equipped with frequency controlled drives and programmable control system.

Variety of optional equipment:

Adaptable mast tie systems.

Different dimensions and capacities or executions on request.

Easy self-climbing mast tower.

The above specification may vary based on customer's request.

CONTROL SYSTEM

Keypad control + floor call system.



CONSULT - SALE - SERVICE

PEGA HOIST Ltd.

Fáblůvka 547
CZ – 533 52 Pardubice
Tel.: +420 466 536 348-50
Fax.: +420 466 536 351
E-mail: info@pega-hoist.com
www.pega-hoist.com

Local representative:

