

# PEGA MATERIAL HOIST – TWO MAST TOWER VERSION

PIONEER IN INNOVATION

QUALITY – RELIABILITY – USER FRIENDLY

PEGA "PLC" - Programmable Landing Control for exact stops for 100 floors

PEGA "LDS" - Load Detection System – brings up to 70% lower power consumption and higher speed

PEGA "FIS" - Fault Indication System

HOT DIP GALVANIZED CAGES WITH STEEL FLOOR AND ALL ACCESSORIES FOR UNLIMITED LIFETIME - ALL AS STANDARD

## PEGA 60ME/II/VFC

### TECHNICAL DATA

Payload capacity	lb	13,200
Speed	ft/min	0 - 100
Rated lifting height	ft	330
Max. tie spacing	ft	30

### CAGE DIMENSIONS


Internal width	19'-8.2"
Internal length	14'-9.2"
Railing height	3'-7.3"

### ELECTRICAL DATA

Power supply range	480V 50Hz 3Ph
Power supply fuse	63A
Motor machinery	PEGA/SEW
Starting current	59A
Power consumption	85kVA
Cable guiding system	Cable trolley

### WEIGHTS

Cage	lb	8,820
Mast section with one rack	lb	330
Mast section length	4'-11.3"	

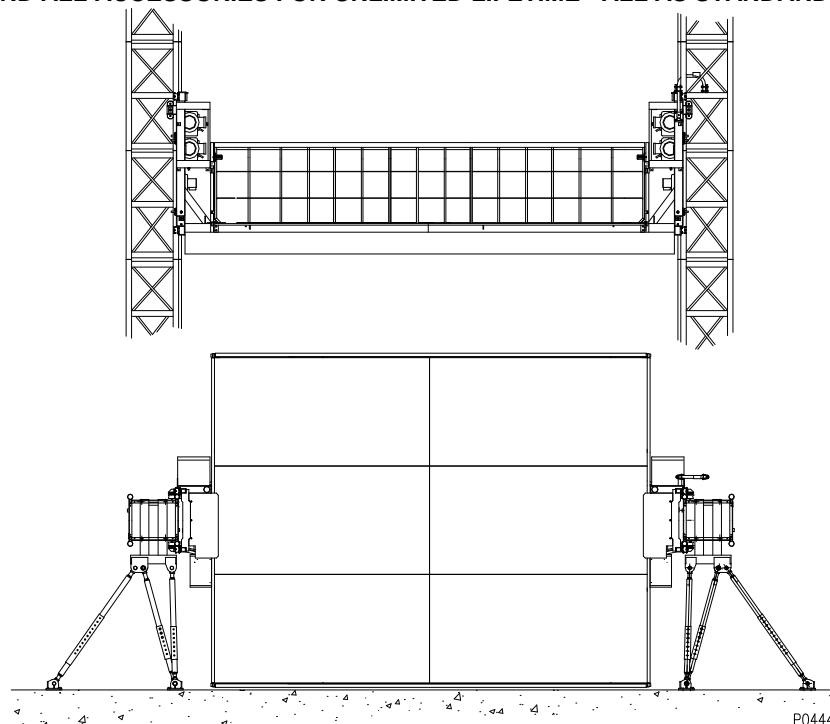

### GENERAL

Platforms equipped with frequency controlled drives and programmable control system.

#### Variety of optional equipment:

- Adaptable mast tie systems.
- Different dimensions and capacities or executions on request.
- Easy self-climbing mast tower.

The above specification may vary based on customer's request.

### CONTROL SYSTEM

Keypad control + floor call system.



## CONSULT - SALE - SERVICE

### PEGA HOIST Ltd.

Fáblůvka 547  
CZ – 533 52 Pardubice  
Tel.: +420 466 536 348-50  
Fax.: +420 466 536 351  
E-mail: info@pega-hoist.com  
www.pega-hoist.com

### Local representative:

