

PEGA RACK AND PINION INDUSTRIAL ELEVATOR

PIONEER IN INNOVATION

QUALITY – RELIABILITY – USER FRIENDLY

- PEGA "PLC" - Programmable Landing Control for exact stop without floor ramps.
- PEGA "LDS" - Load Detection System for lower power consumption.
- PEGA "FIS" - Fault Indication System for simply fault identification.

PEGA IL 1620 TD VFC

TECHNICAL DATA

Payload capacity	lb	3500
Passengers		21
Speed	ft/min	0-200
Lifting height	ft	650
Tie spacing	ft	15 - 30

CAR DIMENSIONS


Internal width x length	4'-11" x 6'-10"
Internal height	7'-3"
Door opening	44" x 80"

ELECTRICAL DATA

Power supply range	480V 60Hz 3Ph
Power supply fuse	63A
Motor machinery	PEGA/SEW
Starting current	50A
Power consumption	71kVA

WEIGHTS

Car weight	lb	5730
Mast section with 1 rack P/A	lb	255/275
Mast section length		4'-11.4"

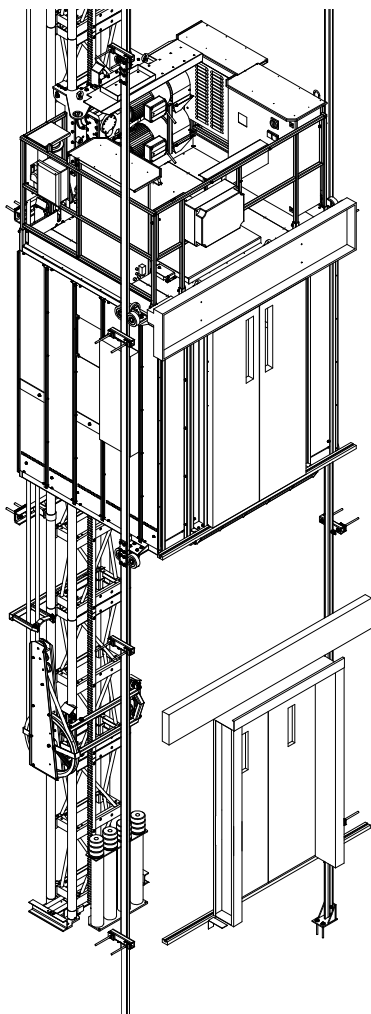

GENERAL

The lift is equipped with frequency controlled drive and programmable control system. Different masts and tie systems to meet all kind of application demands. Car/landing doors automatic with electrical and mechanical inter-locks certified/approved. Single or selective collective automatic control system, emergency lowering system. The above specification may vary based on country and region of delivery.

Norms and regulations: ANSI A10.4 or ASME A17.1

CONTROL SYSTEM

Push button control, floor call system.

CONSULT - SALE - SERVICE

PEGA HOIST Ltd.

Fáblovka 547
CZ – 533 52 Pardubice
Tel.: +420 466 536 348-50
Fax.: +420 466 536 351
E-mail: info@pega-hoist.com
www.pega-hoist.com

PEGA
SUCCESSFULLY
COMPLETED THE
WORLD HIGHEST
BUILDING
BURJ DUBAI

